



global solutions :
local support™

Directional Die Cast Grid Antenna System 1700 to 2700 MHz Operation

The DC24 is a directional antenna system, which incorporates a 2-piece aluminum die cast parabolic grid type antenna reflector with a patented 50-ohm passive feed dipole. Installation is simple with the Laird Technologies adjustable tilt "Heavy Duty" bracket that comes standard. The bracket accommodates poles from 1" up to 2.0" OD. Brackets are full galvanized for extreme corrosion protection and each reflector comes complete with stainless steel hardware and complete assembly instructions. The dipole feed assembly comes with 30" LMR240 pigtail terminated with an N male or N female connector. Other connector configurations are available upon request.

Features and Benefits:

- Small size/reduced shipping cost
- 50-ohm passive feed dipole
- 30" pigtail with N male or N female Connector
- 24 dBi antenna gain; horizontal or vertical polarity
- Rugged, lightweight and waterproof
- Heavy duty adjustable tilt bracket
- 2-Piece powder coat painted die cast aluminum

Applications

- 2.4 GHz ISM Band Applications
- Wireless Internet Access
- Wireless Bridges
- Point to Point Repeaters
- MMDS Applications
- Streaming Video

For sales information:

Telephone 801-572-3024



E-Mail sales@pacwireless.com

or visit: www.pacwireless.com

Specifications

Parameter	Model	Min	Typ	Max	Units
Frequency Range	PF-1 PF-2 PF-19 PF-18	2400 2100 1880 1750		2483 2686 1930 1850	MHz
Gain			24		dBi
Input Return Loss (S11)			-14		dB
VSWR			1.5:1		
3dB Beam Angle			8		deg
Cross Pole			26		dB
Front to Back		24			dB
Side Lobe				-20	dB
Impedance			50		OHM
Input Power				50	W
Focal Length			16 (40.6)		Inch (cm)
Dimension (LxW)			42 (107) x 24 (61)		Inch (cm)
Weight			5.5 (2)		Lbs (Kgs)
Pole Diameter (OD)		1 (25)		2 (50)	Inch (mm)
Operating Temperature		-45		+70	Deg C
Wind Loading: 100MPH 140MPH				80.5 (36.5) 126 (57)	Lbs. (kg)

Antenna Patterns

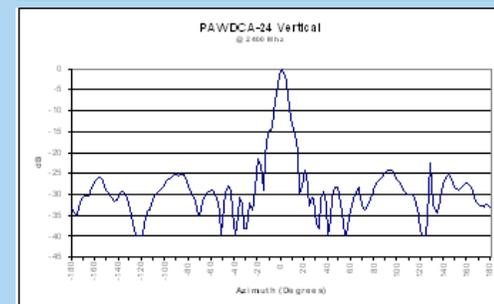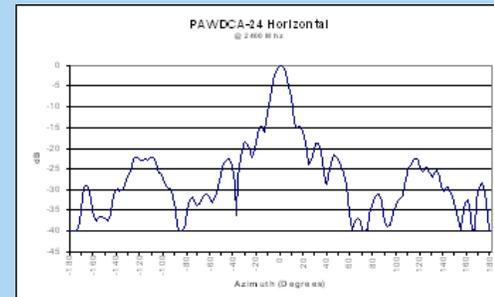

System Ordering:

DC24-HD-PF- - - - -

Freq Range

- PF1 – PMPF-1 2.4 GHz ISM Band
- PF2 – PMPF-2 2.5 GHz MMDS Band
- PF18 – PMPF-18 1.75 to 1.85 GHz
- PF19 – PMPF-19 1.88 to 1.93 GHz DECT

Feed Option

- P – Pigtail with N Male connector
- PF – Pigtail with N Female connector

Notes:

- All shipments F.O.B. Schaumburg, IL 60173
- All antennas carry a 2 Year Warranty

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

Specifications subject to change without notice.



global solutions :
local support™